


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_ QUANTITY \_\_\_\_\_

# iLas® Knife Edge Pocket Framing for Wall Washing

## CONSTRUCTION

- Integrated pocket framing system with 4.375" aperture and knife edge designed for drywall ceiling only
- Compatible luminaire can be adjusted 30° to wash peak candela down wall
- System designed with access to driver compartment for field maintenance
- 18 gauge fixture suspension brackets and 20 gauge plenum cover
- Total system weight — drywall ceiling: 6 lbs./ft.
- Extruded aluminum main housing with integral horizontal and vertical alignment features
- Standard and optional emergency drivers mounted on wireway covers ship with luminaires. Install with quick connect wiring and quarter turn fasteners
- Feed through wiring

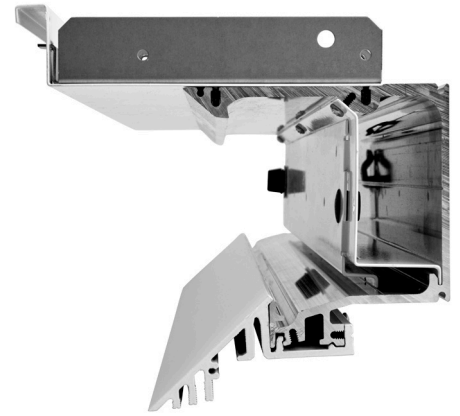



## ORDERING

PRODUCT	POCKET LENGTH	CEILING TYPE	FINISH
<b>iLas® K-FR</b> iLas 4.375" Knife Edge Pocket Framing for Wall Washing	<b>22</b> 22 <sup>7</sup> / <sub>8</sub> " actual <b>34</b> 34 <sup>3</sup> / <sub>8</sub> " actual <b>45</b> 45 <sup>3</sup> / <sub>4</sub> " actual <b>67</b> 67 <sup>3</sup> / <sub>4</sub> " actual <b>90</b> 90 <sup>3</sup> / <sub>8</sub> " actual	<b>G</b> Drywall Ceiling	<b>W</b> White Semi-gloss


## ADDITIONAL COMPONENTS

SPECIFY QUANTITIES

<b>iLasG-FR-OC</b> Outside Corners	<b>iLasG-FR-IC</b> Inside Corners	<b>iLasG-FR-EC</b> End Cap
<b>iLasG-FR-G-UNV</b> Universal Sliding Sleeve (drywall only)		

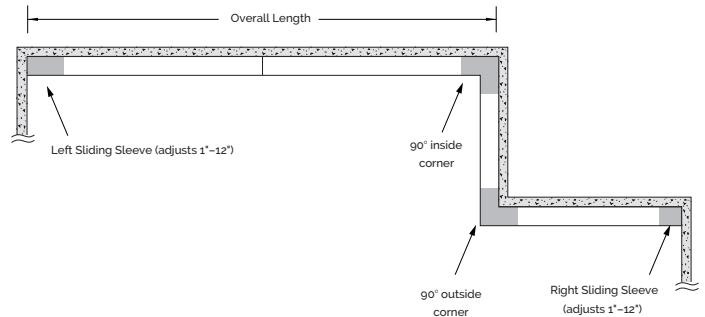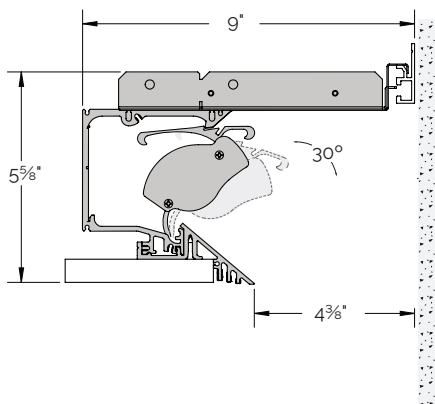

Nominal Length	2FT	3FT	4FT	6FT	8FT
Actual Framing Length	22.875'	34.125'	45.25'	67.75'	90.125'

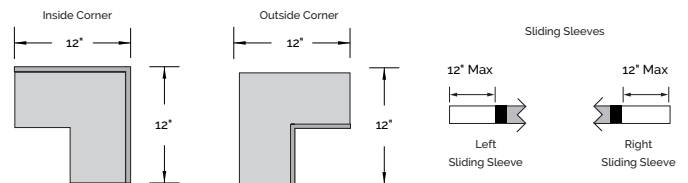

**WARRANTY** 5 Year warranty visit [electrixillumination.com](http://electrixillumination.com) for details

