


DATE _____ PROJECT _____ TYPE _____ QUANTITY _____

iLas® Pocket Framing for Wall Washing

CONSTRUCTION

- Integrated pocket framing system with 6" aperture
- Compatible luminaire can be adjusted 30° to wash peak candela down wall
- System designed with access to driver compartment for field maintenance
- 18 gauge fixture suspension brackets and 20 gauge plenum cover
- Total system weight — drywall ceiling: 6 lbs./ft.; drop ceiling: 5 lbs./ft.
- Extruded aluminum main housing with integral horizontal and vertical alignment features
- Standard and optional emergency drivers mounted on wireway covers ship with luminaires. Install with quick connect wiring and quarter turn fasteners
- Feed through wiring

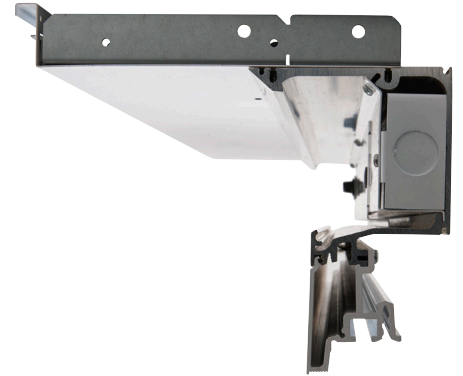

ORDERING

PRODUCT	POCKET LENGTH	CEILING TYPE	FINISH
iLas® W-FR iLas 6" Pocket Framing for Wall Washing	22 22 ⁷ / ₈ " actual	G Drywall Ceiling	W White Semi-gloss
	34 34 ¹ / ₂ " actual		
	45 45 ³ / ₄ " actual	D Drop Ceiling	
	67 67 ³ / ₄ " actual		
90 90 ¹ / ₂ " actual			


ADDITIONAL COMPONENTS

SPECIFY QUANTITIES


iLasW-FR-OC Outside Corners	iLasW-FR-IC Inside Corners	iLasW-FR-EC End Cap
iLasW-FR-D-LSS Left Sliding Sleeve (drop ceiling only)	iLasW-FR-D-RSS Right Sliding Sleeve (drop ceiling only)	iLasW-FR-G-UNV Universal Sliding Sleeve (drywall only)

DRYWALL CEILING:

DROP CEILING:

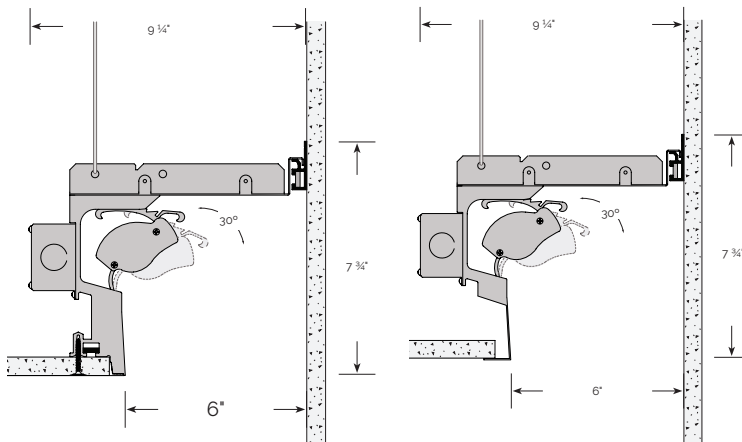

Nominal Length	2FT	3FT	4FT	6FT	8FT
Actual Framing Length	22.875"	34.125"	45.25"	67.75"	90.125"

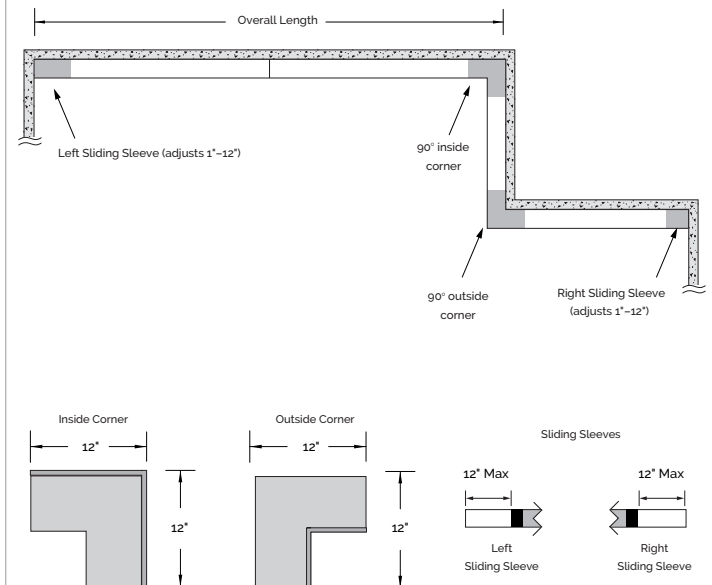

WARRANTY 5 Year warranty visit electrixillumination.com for details

